


## Short Saddle U-Bolt Clamp

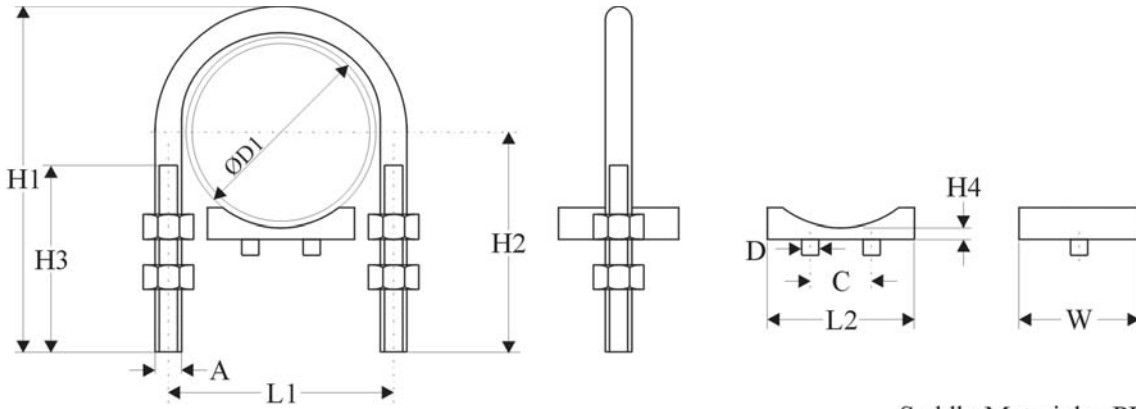

Saddle Material = PP (Polypropylene)

| U-Bolt            |               |        |        |        |       |              |
|-------------------|---------------|--------|--------|--------|-------|--------------|
| Nominal Pipe Size | ØD1 (pipe OD) | L1     | H1     | H2     | H3    | A (thread)   |
| 1 1/4             | 1.660         | 2.063  | 4.125  | 2.875  | 2.375 | 3/8 - 16 UNC |
| 1 1/2             | 1.900         | 2.375  | 4.378  | 3.000  | 2.500 | 3/8 - 16 UNC |
| 2                 | 2.375         | 2.813  | 4.875  | 3.250  | 2.500 | 3/8 - 16 UNC |
| 3                 | 3.500         | 4.063  | 6.313  | 4.000  | 3.000 | 1/2 - 13 UNC |
| 4                 | 4.500         | 5.063  | 7.313  | 4.500  | 3.000 | 1/2 - 13 UNC |
| 6                 | 6.625         | 7.375  | 10.125 | 6.125  | 3.750 | 5/8 - 11 UNC |
| 8                 | 8.625         | 9.375  | 21.125 | 7.125  | 3.750 | 5/8 - 11 UNC |
| 10                | 10.750        | 11.625 | 14.563 | 8.375  | 4.000 | 3/4 - 10 UNC |
| 12                | 12.750        | 13.750 | 16.938 | 9.625  | 4.250 | 7/8 - 9 UNC  |
| 14                | 14.000        | 15.000 | 18.188 | 10.250 | 4.250 | 7/8 - 9 UNC  |
| 16                | 16.000        | 17.000 | 20.188 | 11.250 | 4.250 | 7/8 - 9 UNC  |
| 18                | 18.000        | 19.125 | 22.688 | 12.625 | 4.750 | 1 - 8 UNC    |
| 20                | 20.000        | 21.125 | 24.688 | 13.625 | 4.750 | 1 - 8 UNC    |
| 24                | 24.000        | 25.125 | 28.688 | 15.625 | 4.750 | 1 - 8 UNC    |
| 30                | 30.000        | 31.125 |        | 18.625 | 4.750 | 1 - 8 UNC    |

| Short Saddle |        |       |       |       |
|--------------|--------|-------|-------|-------|
| L2           | C      | D     | H4    | W     |
| 1.500        | 1.000  | 0.313 | 0.250 | 1.000 |
| 1.500        | 1.000  | 0.313 | 0.250 | 1.000 |
| 1.500        | 1.000  | 0.313 | 0.250 | 1.000 |
| 3.000        | 1.563  | 0.563 | 0.313 | 2.000 |
| 3.000        | 1.563  | 0.563 | 0.313 | 2.000 |
| 5.500        | 3.500  | 1.000 | 0.375 | 3.000 |
| 5.500        | 3.500  | 1.000 | 0.375 | 3.000 |
| 5.500        | 3.500  | 1.000 | 0.375 | 3.000 |
| 8.500        | 5.875  | 1.125 | 0.375 | 3.000 |
| 8.500        | 5.875  | 1.125 | 0.375 | 3.000 |
| 8.500        | 5.875  | 1.125 | 0.375 | 3.000 |
| 8.500        | 5.875  | 1.125 | 0.375 | 3.000 |
| 14.000       | 10.500 | 1.125 | 0.500 | 4.000 |
| 14.000       | 10.500 | 1.125 | 0.500 | 4.000 |
| 14.000       | 10.500 | 1.125 | 0.500 | 4.000 |

### Assembly Ordering

**SSUBC-12750 -PP**

**Pipe Diameter**  
Enter ØD1 value from above, excluding decimal

**Material of U-Bolt**  
C Plain Carbon Steel  
Z Zinc Plated  
T 304SS  
X 316SS

### U-Bolt Ordering

**UBC-12750**

**Pipe Diameter**  
Enter ØD1 value from above, excluding decimal

**Material of U-Bolt**  
C Plain Carbon Steel  
Z Zinc Plated  
T 304SS  
X 316SS

### Saddle Ordering

**SS-12750 -PP**

**Pipe Diameter**  
Enter ØD1 value from above, excluding decimal